

**NO**  
CALLBACKS

**NO**  
HAZING

**NO**  
INCONSISTENT  
PERFORMANCE

**NO**  
CHANGES IN  
FORMULA

# POLYSWEEP®

Formulated for Joints Up to 3/4"  
Concrete & Clay Pavers • Natural Stone  
Cast Stone • Porcelain Tile

## POLYSWEEP ESTIMATED COVERAGE PER 50LB. BAG

JOINT SIZE	AREA IN SQ. FT.
Up to 1/4"	50-75
1/4" - 1/2"	25-50
1/2" - 3/4"	15-25

Coverage will vary depending on shape, size & depth of pavers installed.

## POLYSWEEP AVAILABLE COLORS\*



Color may vary due to the nature of aggregates and moisture content.

# X-TREME WIDE JOINT® POLYSWEEP®

Formulated for Joints Up to 4"  
Concrete & Clay Pavers • Natural Stone  
Cast Stone • Porcelain Tile

## X-TREME WIDE JOINT ESTIMATED COVERAGE PER 50LB. BAG

PAVER TYPE	JOINT SIZE	AREA IN SQ. FT.
Standard	Up to 1/4"	50-75
Standard	1/2" - 3/4"	15-25
Natural Stone	Up to 2"	40-50
Natural Stone	2"-4"	25-35

Coverage will vary depending on shape, size & depth of pavers installed.

## X-TREME WIDE JOINT AVAILABLE COLORS\*



Color may vary due to the nature of aggregates and moisture content.

\*Color Availability May Vary By Region.

**SEK SUREBOND**  
HARDSCAPES *Done Right!*

800-932-3343

info@sek.us.com | www.sek.us.com

# POLYSWEEP

Superior Strength Polymeric Sand

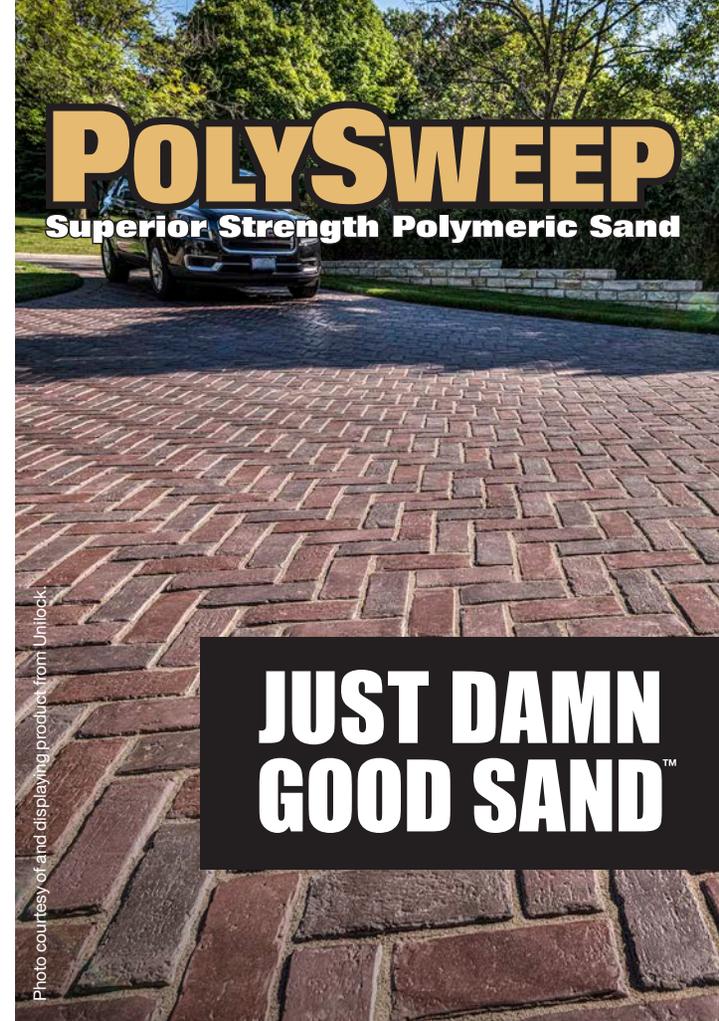


Photo courtesy of and displaying product from Unilock.

**JUST DAMN  
GOOD SAND™**

**NO**  
COMPROMISES

# JUST DAMN GOOD SAND™

## HAZE FREE – GUARANTEED ADVANCED CLEAR SET TECHNOLOGY®

Made with native sands and the highest quality, clearest synthetic polymers.

Contains **NO PORTLAND CEMENT** which often is the cause of hazing and cracking.

## RCS SAFE

Certified Lab Testing demonstrated that PolySweep's level of RCS (Respirable Crystalline Silica) is below reportable limits under normal use.

## SUPERIOR STRENGTH LONG LASTING DURABILITY

Creates a long term, semi-solid joint that resists cracking, prevents sand loss, inhibits weed growth and deters insects.

## STRONGER SET UP

Tested and proven to have superior cohesion and adhesion performance on initial set up and after full cure.

## ONE SAND DOES IT ALL

Residential & Commercial Applications:  
Driveways, Walkways, Patios, Pool Decks & Concrete Overlays.


## LIFETIME LIMITED WARRANTY

If any PolySweep product has been installed per SEK-Surebond instructions, and is proven to have a manufacturer defect, then SEK-Surebond will refund the Polysweep purchase price. SEK-Surebond will only be obligated for the refund of the PolySweep purchase price and will not be responsible or liable for any other costs. See SEK-Surebond website for complete warranty details and restrictions. [www.sek.us.com](http://www.sek.us.com)

## PACKAGING & STORAGE

Available in 50 lb. bags. 56 bags per pallet. Plastic bag is resistant to moisture. However, care must be taken to protect packaging from puncture and long term exposure to constant moisture and ultraviolet light.

## TESTING SHOWS POLYSWEEP OUTPERFORMS THE COMPETITION WHEN IT MATTERS MOST

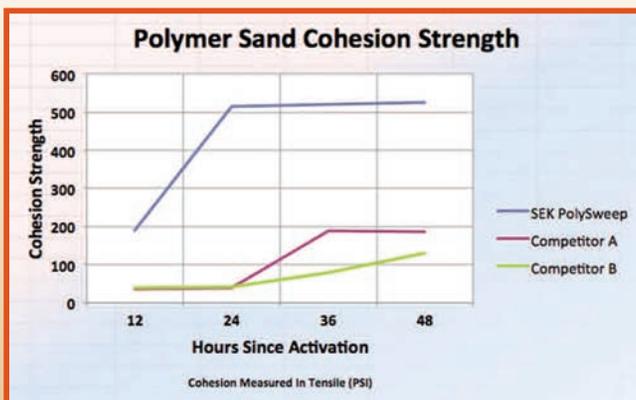

**COHESION** PolySweep achieves superior cohesion versus the competition by a factor of 6 (180 psi VS 30 psi) within 12 hours of activation. PolySweep maintains superior cohesion performance at 24, 36, and 48 hours after activation. (See chart.)

**ADHESION** PolySweep outperforms the competition in its adhesion characteristics. Testing demonstrated that PolySweep has a superior ability versus the competition to adhere to pavers and natural stone which will result in a longer lasting, more stable joint.

**SET UP** Set up is achieved when the polymeric sand has surpassed a cohesion threshold that will not allow heavy rain or strong wind to move it out of the joint. Don't be fooled when assessing set up. Harder is not an indication of good set up, cohesion is an indicator of good set up. PolySweep outperforms the competition in set up.